



# Monitoring Technique

## VARIMETER PRO Phase Monitor BD 9080

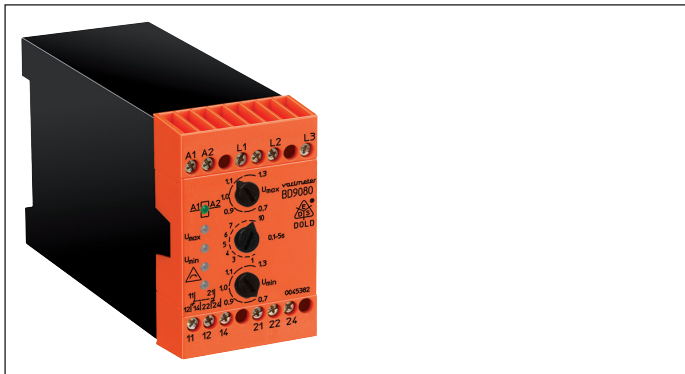

- According to IEC/EN 60255-1
- Monitoring of
  - Under- and overvoltage
  - Asymmetry
  - Phase failure
  - Phase sequence
- Adjustable response delay between 0.1 ... 5 s
- One LED in each case for:
  - Auxiliary voltage A1/A2
  - Overvoltage  $U_{max}$
  - Undervoltage  $U_{min}$
  - Asymmetry / Phase sequence / Power failure
  - Contact position
- Closed circuit operation
- 2 changeover contacts
- As option available with open circuit operation
- Width 45 mm

### Function Diagram

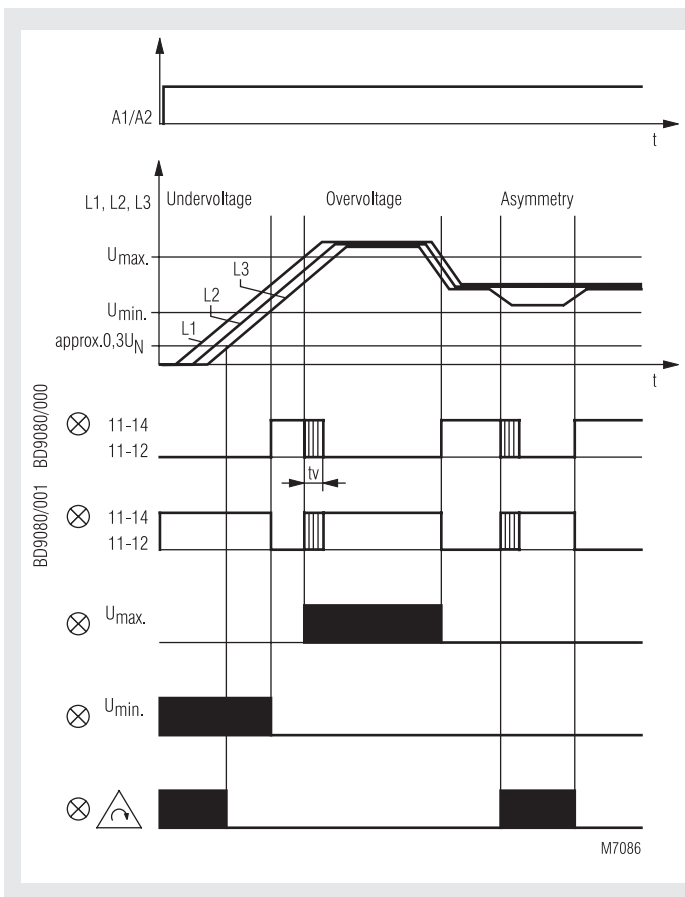

### Approvals and Markings



\*) see variants

### Applications

For monitoring three-phase networks for undervoltage, overvoltage, phase sequence, asymmetry, power failure.


### Indication

- LED A1 / A2: on, when operating voltage present
- LED  $U_{max}$ : on, in event of overvoltage
- LED  $U_{min}$ : on, in event of undervoltage
- LED  $\Delta$ : on, in event of:
  - asymmetry
  - incorrect phase sequence
  - power failure
- LED: on, when output relay activated

### Notes

Measurement procedures: arithmetical mean value measurement over several half-waves of rectified phase voltages L1/L2 and L2/L3. Reference phase is L3. Networks with or without neutral can be monitored. The auxiliary voltage to be applied to A1/A2 can also be taken from the three-phase network which is to be monitored. This reduces to 0.8 - 1.1  $U_n$  the permitted range of voltage of the network to be monitored.

### Circuit Diagram




### Connection Terminals

Terminal designation	Signal description
L1, L2, L3	Connection phase voltage (L1, L2, L3)
A1, A2	Auxiliary voltage
11, 12, 14	Indicator relay (1. C/O contact)
21, 22, 24	Indicator relay (2. C/O contact)


Technical Data	
<b>Input Circuit</b>	
<b>Nominal voltage <math>U_N</math></b> L1 / L2 / L3:	3 AC 230, 400, 690, 750 V (other voltages on request)
<b>Setting range:</b>	0.7 ... 1.3 $U_N$ <sup>*)</sup> *) 0.8 ... 1.1 $U_N$ if auxiliary voltage is taken from the monitored net
<b>Overload capacity of <math>U_N</math>:</b>	1.5 $U_N$ / 2 $U_N$ (10 s) max. 1 000 V
<b>Nominal frequency of <math>U_N</math>:</b>	50 / 60 Hz
<b>Frequency range of <math>U_N</math>:</b>	45 ... 65 Hz
<b>Accuracy:</b>	$\leq \pm 0.5$ % of $U_N$
<b>Power consumption with <math>U_N</math>:</b>	L1 approx. 0.5 mA L2 approx. 0.5 mA L3 approx. 0.8 mA
<b>Hysteresis:</b>	$\leq 5$ % x $U_A$ ( $U_A$ = response value)
<b>Asymmetry detection</b> Voltage:	$U_A \pm 8$ ... 20 %
<b>Fault angle:</b>	Approx. $120^\circ \pm 15^\circ$
<b>Temperature influence:</b>	$\leq 0.08$ % / K
<b>Auxiliary Circuit</b>	
<b>Auxiliary voltage <math>U_H</math></b> A1 / A2:	
	AC 110, 230, 400 V AC/DC 24 ... 80 V, AC/DC 80 ... 230 V (other voltages on request)
<b>Voltage range of <math>U_H</math>:</b>	0.8 ... 1.1 $U_H$
<b>Nominal frequency of <math>U_H</math>:</b>	50 / 60 Hz
<b>Frequency range of <math>U_H</math>:</b>	45 ... 500 Hz
<b>Nominal consumption:</b>	2.4 VA
<b>Output Circuit</b>	
<b>Contacts:</b>	2 changeover contacts
<b>Response-/Release time:</b>	Approx. 900 / 150 ms
<b>Response delay <math>t_v</math>:</b>	0.1 ... 5 s
<b>Thermal current <math>I_{th}</math>:</b>	6 A (see continuous current limit curve)
<b>Switching capacity</b>	
to AC 15	
NO contact:	2 A / AC 230 V IEC/EN 60947-5-1
NC contact:	1 A / AC 230 V IEC/EN 60947-5-1
to DC 13	
NO contact:	1 A / DC 24 V IEC/EN 60947-5-1
NC contact:	1 A / DC 24 V IEC/EN 60947-5-1
<b>Electrical life:</b>	
to AC 15 at 1 A, AC 230 V:	
NO contact:	2.5 x 10 <sup>5</sup> switching cycles
<b>Permissible switching frequency:</b>	20 switching cycles / s
<b>Short circuit strength max. fuse rating:</b>	4 A gG/gL IEC/EN 60947-5-1
<b>Mechanical life:</b>	$\geq 50$ x 10 <sup>6</sup> switching cycles
<b>General Data</b>	
<b>Operating mode:</b>	Continuous operation
<b>Temperature range</b>	
Operation:	- 20 ... + 60°C
Storage:	- 20 ... + 60°C
<b>Altitude:</b>	< 2000 m
<b>Clearance and creepage distances</b>	
rated impulse voltage / pollution degree	
auxiliary voltage:	6 kV / 2 IEC 60664-1
Contact / contact:	4 kV / 2 IEC 60664-1
Overvoltage category:	III
<b>EMC</b>	
Electrostatic discharge:	8 kV (air) IEC/EN 61000-4-2
HF irradiation	
80 MHz ... 2.7 GHz:	10 V / m IEC/EN 61000-4-3
Fast transients:	2 kV IEC/EN 61000-4-4
Surge voltages between	
wires for power supply:	1 kV IEC/EN 61000-4-5
between wire and ground:	2 kV IEC/EN 61000-4-5
HF wire guided:	10 V IEC/EN 61000-4-6
Interference suppression:	Limit value class B EN 55011

Technical Data	
<b>Degree of protection</b>	
Housing:	IP 40 IEC/EN 60529
Terminals:	IP 20 IEC/EN 60529
<b>Housing:</b>	Thermoplastic with V0 behaviour according to UL subject 94
<b>Vibration resistance:</b>	Amplitude 0.35 mm IEC/EN 60068-2-6 frequency 10 ... 55 Hz,
<b>Climate resistance:</b>	20 / 060 / 04 IEC/EN 60068-1
<b>Wire connection:</b>	DIN 46228-1/-2/-3/-4
<b>Fixed screw terminals</b>	
Cross section:	0.1 ... 4 mm <sup>2</sup> (AWG 28 - 12) solid or 0.1 ... 2.5 mm <sup>2</sup> (AWG 28 - 12) stranded wire with ferrules
Stripping length:	10 mm
<b>Fixing torque:</b>	0.8 Nm
<b>Wire fixing:</b>	Cross-head screw / M3,5 box terminals
<b>Mounting:</b>	DIN rail IEC/EN 60715
<b>Weight:</b>	325 g
<b>Dimensions</b>	
<b>Width x height x depth:</b>	45 x 74 x 133 mm

Classification to DIN EN 50155	
<b>Vibration and shock resistance:</b>	Category 1, Class B IEC/EN 61373
<b>Protective coating of the PCB:</b>	No
<b>UL-Data</b>	
<b>Switching capacity:</b>	Pilot duty B300

 Technical data that is not stated in the UL-Data, can be found in the technical data section.

CCC-Data	
<b>Thermal current <math>I_{th}</math>:</b>	5 A

 Technical data that is not stated in the CCC-Data, can be found in the technical data section.

Standard Type	
BD 9080.12	3 AC 400 V AC 230 V
Article number:	0045382
• Output:	2 changeover contacts
• Nominal voltage $U_N$ :	3 AC 400 V
• Auxiliary voltage $U_H$ :	AC 230 V
• Closed circuit operation	
• Width:	45 mm


## Variants

BD 9080.12/61:	With UL-approval on request
BD 9080:	With CCC-approval on request
BD 9080.12/001:	Open circuit operation
BD 9080.12/020:	Output relay indicates only under- and overvoltage
BD 9080.12/200:	With extended temperature range of - 40 ... + 70 °C



### Remark

At an ambient temperature of + 70°C the device has to be mounted with 2 cm space to the neighbour units and the necessary air circulation must be provided. The contact current must not be more then 2 A.  
The life of the product may be reduced by the higher ambient temperature!


### Ordering example for variant

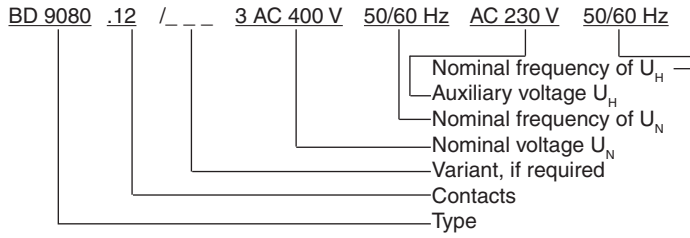

## Connection Examples

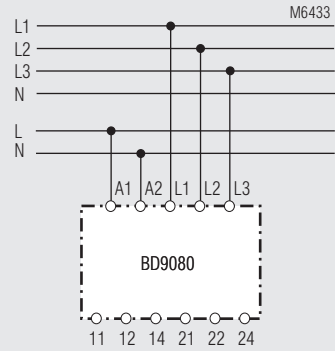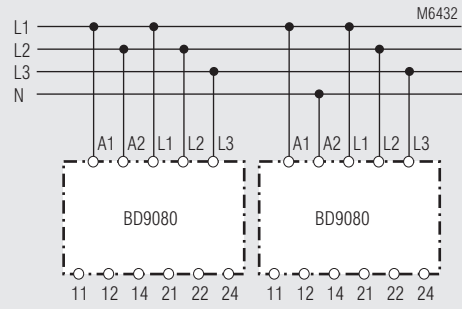

## Characteristic

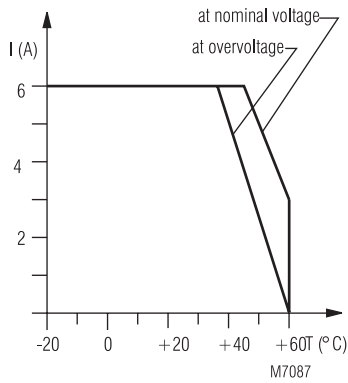

Continuous current limit curve

