


## VARIMETER Phase Monitor RK 9872

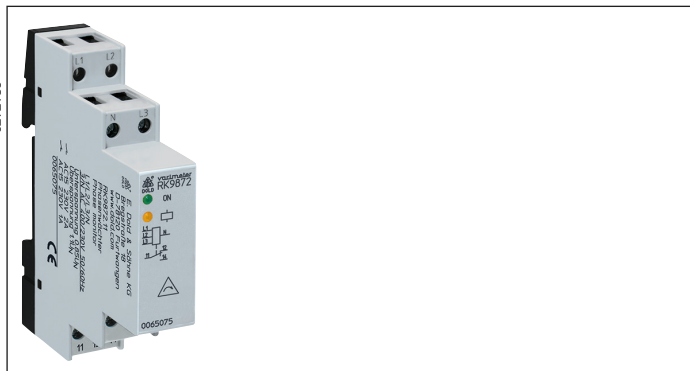

### Your Advantages

- Reliability monitoring of 3- or 1-phase voltage systems on:
  - Undervoltage
  - Overvoltage
  - Phase sequence (at 3-phase voltage system)
- Fast fault location
- Preventive maintenance
- Space saving

### Features

- According to IEC/EN 60255-1
- Detection of under-/overvoltage and phase sequence in 3-phase voltage systems
- Without separate auxiliary voltage
- LED-Indication for operation voltage and contact position
- De-energized on trip
- With fixed response value for undervoltage
- With fixed response value for overvoltage
- Width: 17,5 mm

### Product Description

The space saving phase monitor RK9872/800 from the Varimeter family monitors under- and overvoltage as well as phase sequence in 3-phase systems.


The response values are fixed. When connecting the measuring voltage to the inputs L1-L2-L3 and fault free system the relay switches on.

When the measuring voltage is connected the unit checks a clockwise phase sequence. If this is not the case the yellow LED flashes. The output relay will not energise. After detection of under- or overvoltage on one or more phases for more than 5 sec. the relay switches off. The relay stays off for at least 2 seconds. The phase monitor measures the arithmetic mean value of the 3 phases against neutral.

### Approvals and Markings



### Function Diagramm

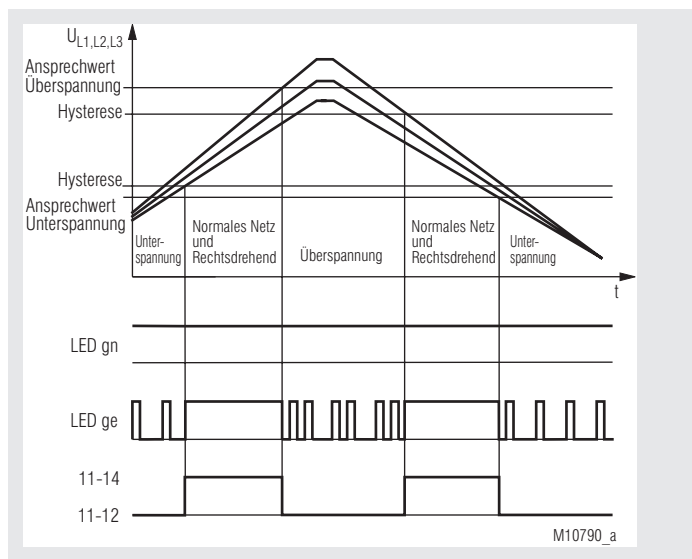

### Application

Monitoring of voltage systems on undervoltage, overvoltage and phase sequence, e. g. for applications with squirrel cage motors and -machines, cranes, elevator, escalator, pumps, aircondition.


### Indicators

- |             |   |
|-------------|---|
| green LED:  | on, when nominal voltage connected            |
| yellow LED: | on, when corresponding output relay is active |
| yellow LED: | flashes at failure with code:                 |
|             | 1 x at undervoltage                           |
|             | 2 x at overvoltage                            |
|             | 3 x at phase reversal                         |

### Safety Notes

- Faults must only be removed when the relay is disconnected.
- The user has to make sure that the device and corresponding components are installed and wired according to the local rules and law (TUEV, VDE, Health and safety).
- Settings must only be changed by trained staff taking into account the safety regulations. Installation work must only be done when power is disconnected.
- If the connected system creates a reverse voltage above the undervoltage response value the failure cannot be detected.

## Circuit Diagram

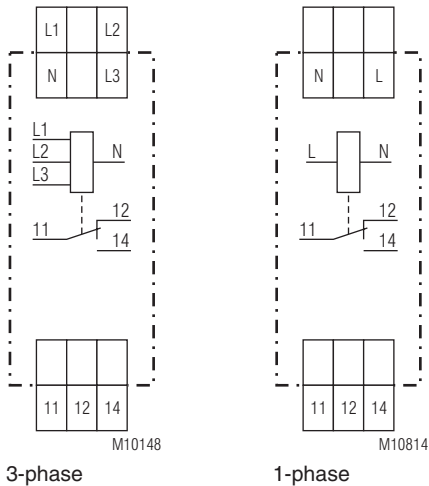

## Connection Terminals

Terminal designation	Signal designation
L1	Phase voltage L1
L2	Phase voltage L2
L3	Phase voltage L3
L	Phase voltage L
N	Neutral
11, 12, 14	Changeover contact (output relay)

## Technical Data

### Input

Measuring voltage = supply voltage

Nominal voltage $U_N$ :	3/N AC 400/230V
Max. overload:	1.15 $U_N$ continuously
Nominal consumption:	approx. 6 VA
Nominal frequency:	50 / 60 Hz
Measuring frequency range:	45 ... 65 Hz

Response value*):	3-phase		1-phase	
	3N AC 400 / 230 V	AC 400 V	AC 110 V	
Undervoltage:	195.5 V	360 V	99 V	
Overvoltage:	253 V	440 V	121 V	
Hysteresis:	2.5 %	1.5 %	2.0 %	
Accuracy:				± 3%
Repeat accuracy:				< 2%
Temperature influence:				< 1%

\*) the response values are fixed and measured against N

Reaction time:	≤ 50 ms
Overvoltage category:	III (according to IEC 60664-1)

### Output

Contacts:	1 changeover contact	
Thermal current $I_{th}$ :	4 A	
Switching capacity to AC 15:		
NO contacts:	2 A / AC 230 V	IEC/EN 60 947-5-1
NC contacts:	1 A / AC 230 V	IEC/EN 60 947-5-1
Electrical life to AC 15 at 1 A, AC 230 V:	1 x 10 <sup>5</sup> switch. cycl. IEC/EN 60 947-5-1	
Mechanical life:	1 x 10 <sup>6</sup> switching cycles	

## Technical Data

### General Data

Nominal operating mode:	continuous operation
Temperature range:	
Operation:	- 25 ... + 60°C
Storage:	- 25 ... + 70°C

### Clearance and creepage distance

contact / measuring voltage		
rated impuls voltage / pollution degree:	6 kV / 2	IEC 60 664-1

### EMC

Electrostatic discharge (ESD):	8 kV (air)	IEC/EN 61 000-4-2
HF-HF irradiation		
80 MHz ... 2.7 GHz:	10 V / m	IEC/EN 61 000-4-3
Fast transients:	2 kV	IEC/EN 61 000-4-4
Surge voltages		
between power supply:	1 kV	IEC/EN 61 000-4-5
between wire and ground:	2 kV	IEC/EN 61 000-4-5
HF-wire guided:	10 V	IEC/EN 61 000-4-6
Interference suppression:	Limit value class B	EN 55 011

### Degree of protection

Enclosure:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529

### Housing:

thermoplastic with VO behaviour acc. to UL subject 94	
Vibration resistance:	
Amplitude 0.35 mm,	
Frequency 10 ... 55 Hz	IEC/EN 60 068-2-6
25 / 060 /04	IEC/EN 60 068-1
EN 50 005	DIN 46 228-1/-2/-3/-4

### Climate resistance:

### Terminal designation:

### Wire connection:

### Fixed screw terminals

Cross section:	0.34 ... 2.5 mm <sup>2</sup> (AWG 22 - 14) solid or 0.34 ... 2.5 mm <sup>2</sup> (AWG 22 - 14) stranded wire with and without ferrules
Stripping length:	7 mm
Fixing torque:	0.5 Nm EN 60 999-1
Wire fixing:	Captive slotted screw / M2.5
Mounting:	DIN-rail IEC/EN 60 715
Weight:	approx. 70 g

## Dimensions

Width x height x depth:	17.5 x 90 x 66 mm
-------------------------	-------------------

## Standard Type


RK 9872.11	3/N AC 400/230 V	50 / 60 Hz
Article number::	0065075	
• Output:	1 changeover contact	
• Nominal voltage $U_N$ :	3/N AC 400/230 V	
• Width:	17.5 mm	

## Variant


RK 9872.11/100:	Undervoltage / overvoltage monitoring
-----------------	---------------------------------------

## Ordering example for variant


RK9872. 11 /1 0 0 3/N 400/230V 50/60Hz

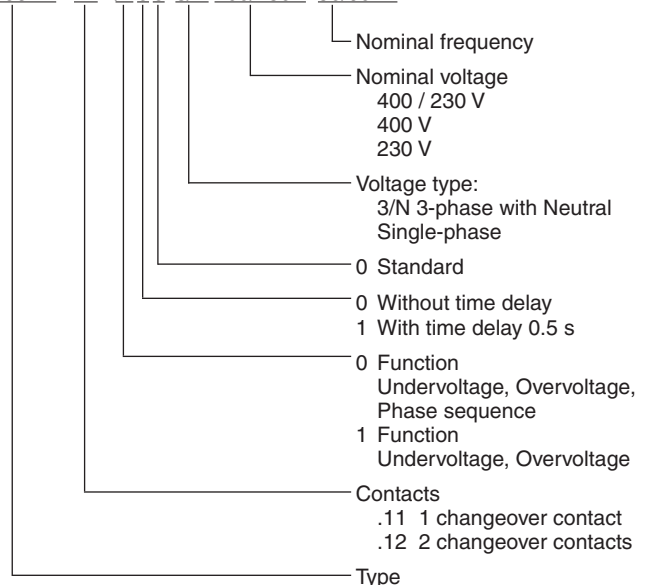

## Connection Examples

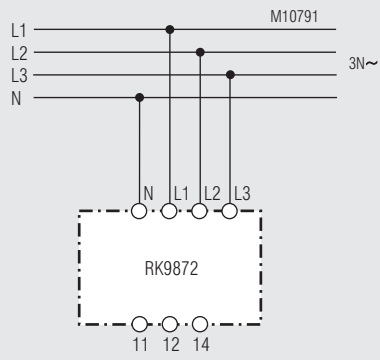

3-phase

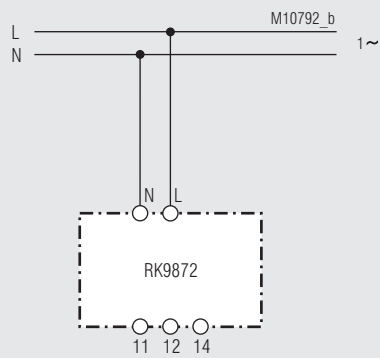

1-phase

